


16 CH HDCVI 2 SATA HDD Analog Digital Video Recorder

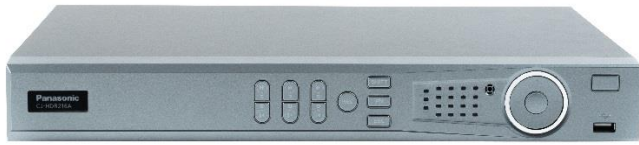


Key Features

- 16 CH with 720P/1080P recording playback and live view
- H.264 video compression
- 1/4/9/16 CH synchronous real time playback
- HDMI/ VGA simultaneous video output
- Supports 2 SATA HDDs up to 8TB for each disk, 2 USBs
- Digital zoom during live & playback
- iPhone, iPad, Android

Standard Accessories

- Quick Start Guide.....1 pc
- Important Safety Instructions.....1 pc
- CD1 pc

Appearance

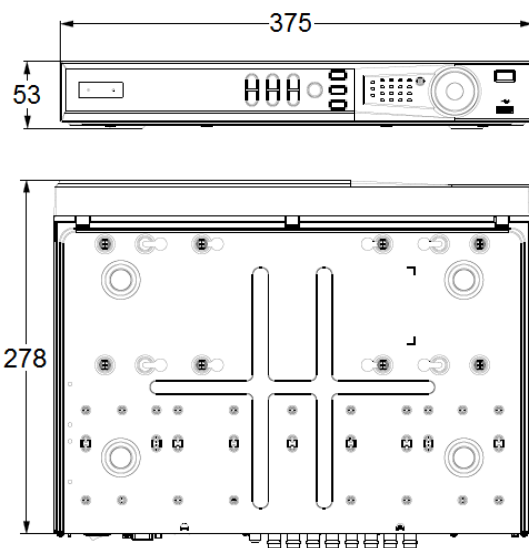

Specifications

Model		CJ-HDR216A
Video/Audio IF		
Video Input		16 CH, BNC
Type	HDCVI	720P/1080P
	Analog	PAL/NTSC
Video Output		1 HDMI, 1 VGA
Audio Input		1 CH, RCA
Audio Output		1 CH, RCA
Two-way Talk		Reuse audio input/output CH 1
Display		
Output Resolution		1920x1080, 1280x1024, 1280x720, 1024x768
Multiscreen Mode		1/4/8/9/16
Privacy Masking		4 rectangular zones (each camera)
OSD		Camera title, Time, Video loss, Camera lock, Motion detection, Recording
Video/Audio Format		
Video/Audio Compression		H.264/G.711a
Record Rate*	Main Stream	1280*1440/1080P/1080N/720P/960H/D1/HD1/BCIF/CIF/QCIF (1~25/30fps)
	Sub Stream	D1/CIF/QCIF (1~15fps)
Bit Rate		1Kbps~6144Kbps per channel
Record Mode		Manual, Schedule (Regular, Continuous), Alarm, MD, Stop
Record Interval		1~60 min (default: 60 min), Pre-record: 0~30 sec, Post-record: 10~300 sec
Alarm/Event		
Trigger Events		Recording, PTZ, Tour, Email, FTP, Snapshot, Buzzer, Show Message, Alarm Upload, Video Matrix and Log
Video Detection		Motion Detection, MD Zones: 396 (22x18)/330 (22x15), Video Loss, Tampering
Playback & Backup		
Sync Playback		1/4/9/16
Search Mode		Time/Date, Alarm, MD and Exact Search (accurate to second)
Playback Functions		Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom, Customized playback, Splice playback
Backup Mode		USB Device/Network
Network		
Network Interface		RJ-45 port (1000M)
Network Functions		HTTP, HTTPS, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, DDNS, FTP, SNMP, EZ Remote
Max. User Access		128 users
Mobile Device		iPhone, iPad, Android
HDD		
Type		2 SATA ports, up to 8TB for each disk
External Interface		
USB Interface		2 ports (1 rear), 1 USB2.0, 1 USB3.0
RS485 Camera Interface		1 port, for PTZ Control
General Specifications		
Power Supply		DC12V/4A
Power Consumption		<15W (without HDD)
Working Environment		-10°C~+55°C/0%~90%RH
Dimension (WxDxH)		1U, 375mmx288.95mmx53mm
Weight		1.74kg (without HDD)

- For channel 1, channel 5, channel 9 and channel 13, the change of the frame rate to 15fps or more at 1080P and above, will update the frame rate settings of other channels to 15fps.

- Recommended to schedule a weekly reboot.

Important

- Safety Precaution: Carefully read the user's manual before using this product.

- All pictures are simulated.
- Weights and dimensions are approximate.
- Specifications are subject to change without notice.
- These products may be subject to export control regulations.

DISTRIBUTED BY: